


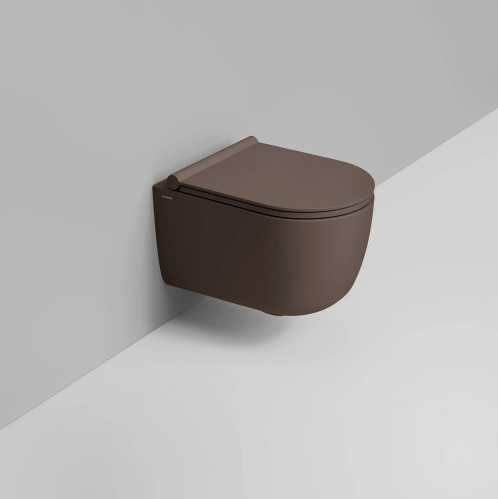

Wall hung with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the vortex system and the specially designed internal surface. Installation requires a dedicated wall mounted support brackets. To be completed with seat.

TECHNICAL DATA

Width	360 (mm)
Depth	500 (mm)
Height	300 (mm)
Weight	23.5 (kg)
Exhaust type	horizontal outlet
Installation type	wall hung

- Fixings included
- Hidden fixation set bottom drive
- 4,5-3 L flush
- Vortex

FINISHES

- 01

White
- 41

Matt White
- 81

Matt Black
- 06

Glossy Natural Beige
- 07

Glossy Alpine Brown
- 47

Matt Natural Beige
- 48


Matt Red Wine
- 66

Matt Natural Beige
- 65

Antique Pink
- 71

Sky Blue
- 45

Concrete Grey

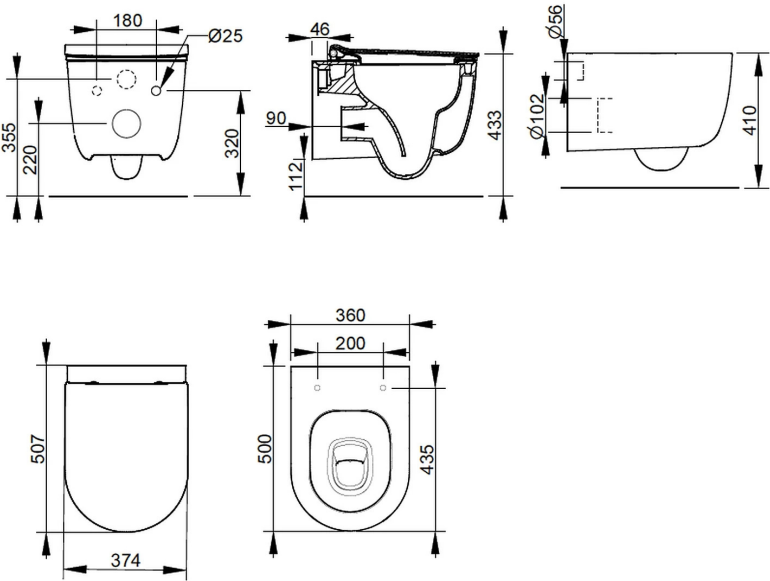

COMPLEMENTS



S473347
soft closing seat and cover, in thermosetting material, with metal hinges and quick-release system.



ACCESSORIES



F953199

fixing set for hidden wall hung installation.

(included)



F953099

chair brackets for wall mounted wc/bidet.

(required)



VS52701

buffers kit for mia/mirto/gemma2 seat and cover



VS371CR

hinges with horizon fixation set for mrto round normal closing seat and cover.



VS373CR

hinges with horizon fixation set for mrto round soft closing seat and cover.



F956199

mounting frame for wall-mounted wc equipped with dolomite 6e cistern (4,5/6lt) for load-bearing installations. not suitable for lightweight walls or plasterboard. anti-corrosion galvanised frame 2 mm metal thickness. structure certified according to standards uni en 977/1-997-89500/2.



F956299

mounting frame for wall-hung wc equipped with dolomite 6e cistern (4,5/6lt). according to the specific kit supplied, is suitable for load-bearing installations, pre-existing load-bearing installations, lightweight walls and plasterboard. structure certified according to standards uni en 977/1-997-89500/2.



A412199

fixing kit for plasterboard walls for f956299



F956399

mounting frame for wall-mounted wc equipped with dolomite 6e cistern (4,5/6lt). according to the specific kit supplied, is suitable for load-bearing installations, pre-existing loadbearing installations, lightweight walls and plasterboard. self-supporting painted tubular steel frame. overall dimensions for 100 mm raw walls.



F953999

soundproofing protection set for wall hung sanitaryware.