




Cod. **D475847** BTW VORTEX BOWL

DOP EN 997

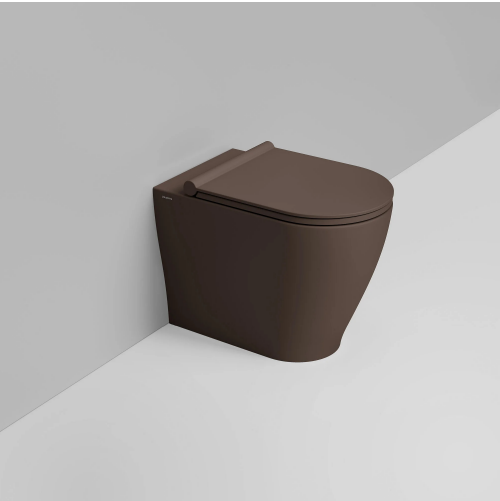

BTW with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the vortex system and the specially designed internal surface. To be completed with seat and, if required, a technical bend for floor outlet.

TECHNICAL DATA

Width	360 (mm)
Depth	550 (mm)
Height	410 (mm)
Weight	30 (kg)
Exhaust type	universal outlet
Installation type	back to wall







- Fixings included
- 4,5-3 L flush
- Shifted bowl
- Vortex
- Hidden fixation set



3.45 liters

FINISHES

- 01 White
- 41 Matt White
- 81 Matt Black
- 06 Glossy Natural Beige
- 07 Glossy Alpine Brown
- 47 Matt Natural Beige
- 48 Matt Red Wine
- 66 Matt Natural Beige
- 65 Antique Pink
- 71 Sky Blue
- 45 Concrete Grey



A		
Curva	Da	a
F950099	55	85
F950399	130	140
F950199	160	190 Max
F951199	Racc. eccentrico 20mm	
F951299	Racc. eccentrico 40mm	

COMPLEMENTS



S473347

soft closing seat and cover, in thermosetting material, with metal hinges and quick-release system.



ACCESSORIES



F953299
fixing set for hidden btw
installation.
(included)



F950099
plastic outlet bend 90° - for
installation, please refer to
technical sheet.



F950199
plastic outlet bend 90°, to be
installed only on shifted btw
bowl - for installation, please
refer to technical sheet.



F950399
plastic 's' outlet bend 90° - for
installation, please refer to
technical sheet.



F951199
eccentric adapter for outlet +/-
20mm.



F951299
eccentric adapter for outlet +/-
40mm.



VS52701
buffers kit for
mia/mirto/gemma2 seat and
cover



VS373CR
hinges with horizon fixation set
for mrto round soft closing seat
and cover.



F956099
dolomite concealed cistern for
floor-standing wc. pipe with
rosette 40mm. ideal for
integration with state-of-the-art
sanitary ware that is also
certified for reduced flushing.
monoblock container with a
nominal thickness of 85mm.
norma-plus float valve,
acoustic class 1, lga-tuv
approved adjustable between 6
and 4.5lt.