


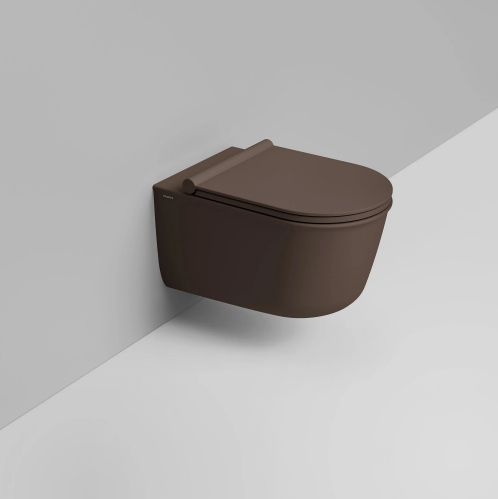

Wall hung with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the rimless system and the specially designed internal surface. Installation requires a dedicated wall mounted support brackets. To be completed with seat.

TECHNICAL DATA

Width	360 (mm)
Depth	550 (mm)
Height	310 (mm)
Weight	25.4 (kg)
Exhaust type	horizontal outlet
Installation type	wall hung


-  Fixings included
-  Hidden fixation set
bottom drive
-  4,5-3 L flush
-  Rimless System

 Water Label

 3.14 liters

FINISHES

-  01
White
-  41
Matt White
-  81
Matt Black
-  45
Concrete Grey
-  65
Antique Pink
-  71
Sky Blue
-  66
Matt Natural Beige
-  06
Glossy Natural Beige
-  47
Matt Natural Beige
-  07
Glossy Alpine Brown
-  48
Matt Red Wine

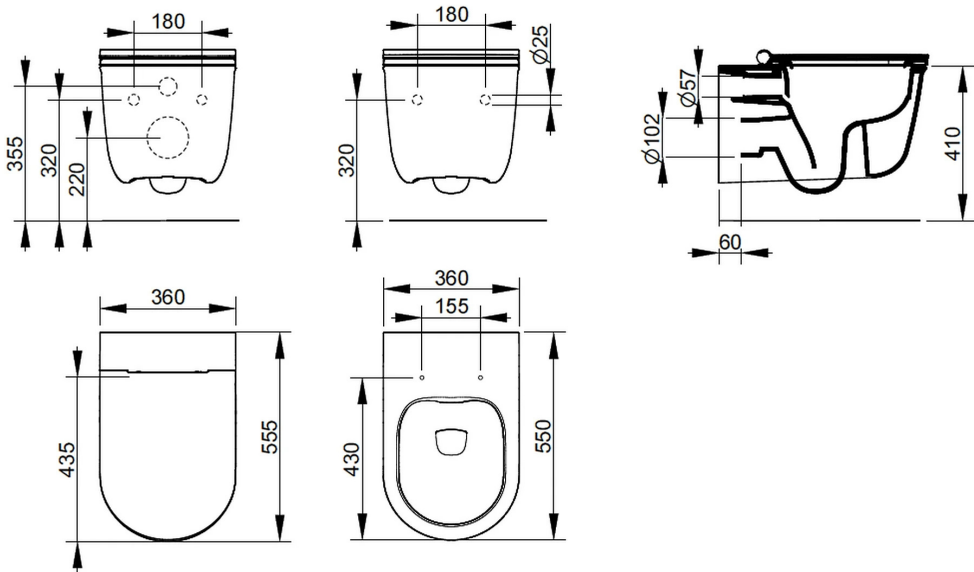

COMPLEMENTS



S483347
soft closing seat and cover, in
thermosetting material, with
metal hinges and quick-release
system.



ACCESSORIES

**F953199**

fixing set for hidden wall hung installation.

(included)

**F953099**

chair brackets for wall mounted wc/bidet.

(required)

**VS50799**

buffers kit for mayka seat and cover

**VS485CR**

hinges with horizon fixation set for maika soft closing seat and cover.

**F956399**

mounting frame for wall-mounted wc equipped with dolomite 6e cistern (4,5/6lt). according to the specific kit supplied, is suitable for load-bearing installations, pre-existing loadbearing installations, lightweight walls and plasterboard. self-supporting painted tubular steel frame. overall dimensions for 100 mm raw walls.

**F953999**

soundproofing protection set for wall hung sanitaryware.

**F953699**

universal support for wall mounted wc and plasterboard wall.

**F956299**

mounting frame for wall-hung wc equipped with dolomite 6e cistern (4,5/6lt). according to the specific kit supplied, is suitable for load-bearing installations, pre-existing load-bearing installations, lightweight walls and plasterboard. structure certified according to standards uni en 977/1-997-89500/2.

**A412199**

fixing kit for plasterboard walls for f956299

**F956199**

mounting frame for wall-mounted wc equipped with dolomite 6e cistern (4,5/6lt) for load-bearing installations. not suitable for lightweight walls or plasterboard. anti-corrosion galvanised frame 2 mm metal thickness. structure certified according to standards uni en 977/1-997-89500/2.