


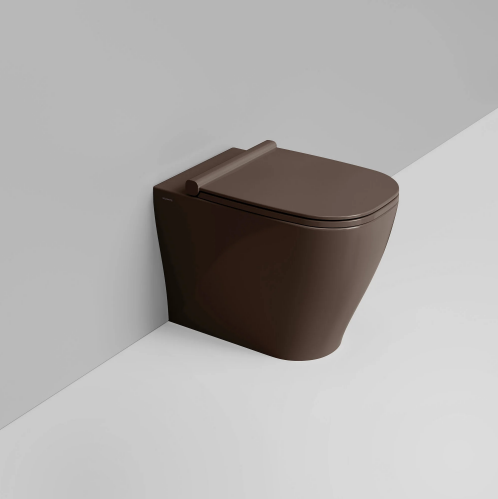

BTW with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the rimless system and the specially designed internal surface. To be completed with seat and, if required, a technical bend for floor outlet.

TECHNICAL DATA

|                   |                  |
|-------------------|------------------|
| Width             | 360 (mm)         |
| Depth             | 550 (mm)         |
| Height            | 410 (mm)         |
| Weight            | 34.7 (kg)        |
| Exhaust type      | universal outlet |
| Installation type | back to wall     |


-  Fixings included
-  4,5-3 L flush
-  Shifted bowl
-  Rimless System
-  Hidden fixation set

 Water Label

 3.48 liters

FINISHES

-  01  
White
-  41  
Matt White
-  81  
Matt Black
-  06  
Glossy Natural Beige
-  07  
Glossy Alpine Brown
-  47  
Matt Natural Beige
-  48  
Matt Red Wine
-  66  
Matt Natural Beige
-  65  
Antique Pink
-  71  
Sky Blue
-  45  
Concrete Grey

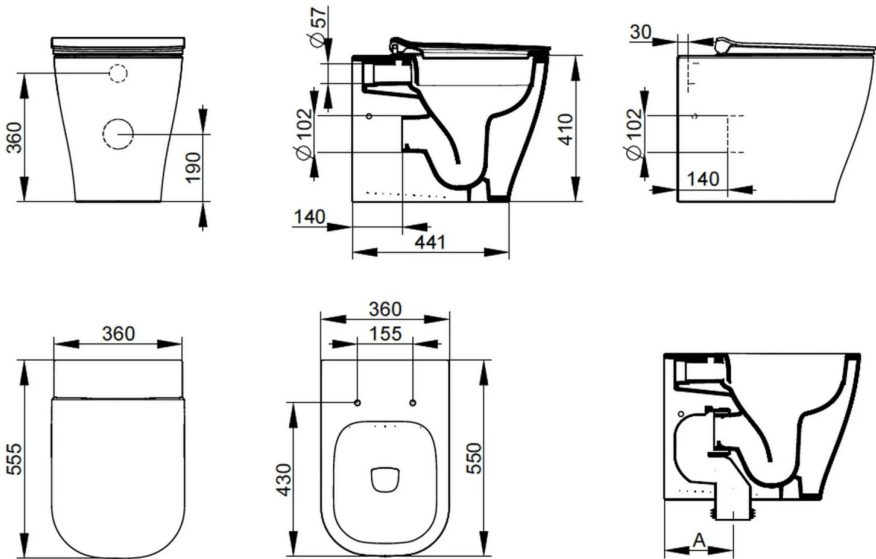

COMPLEMENTS



**S463307**  
soft closing seat and cover, in  
thermosetting material, with  
metal hinges and quick-release  
system.



## ACCESSORIES



**F953299**  
fixing set for hidden btw  
installation.  
(included)



**VS52701**  
buffers kit for  
mia/mirto/gemma2 seat and  
cover



**F950099**  
plastic outlet bend 90° - for  
installation, please refer to  
technical sheet.



**F950199**  
plastic outlet bend 90°, to be  
installed only on shifted btw  
bowl - for installation, please  
refer to technical sheet.



**F950399**  
plastic 's' outlet bend 90° - for  
installation, please refer to  
technical sheet.



**F951199**  
eccentric adapter for outlet +/-  
20mm.



**F951299**  
eccentric adapter for outlet +/-  
40mm.



**F956099**  
dolomite concealed cistern for  
floor-standing wc. pipe with  
rosette 40mm. ideal for  
integration with state-of-the-art  
sanitary ware that is also  
certified for reduced flushing.  
monoblock container with a  
nominal thickness of 85mm.  
norma-plus float valve,  
acoustic class 1, lga-tuv  
approved adjustable between 6  
and 4.5lt.