Cod. **D483107** BTW BOWL DOP EN 997

BTW with concealed fixing set supplied. It is certified for 4.5-liter flushing thanks to the rimless system and the specially designed internal surface. To be completed with seat and, if required, a technical bend for floor outlet.

TECHNICAL DATA

Width	360 (mm)
Depth	550 (mm)
Height	410 (mm)
Weight	36.6 (kg)
Exhaust type	universal outlet
Installation type	back to wall

Fixings included
4,5-3 L flush
Shifted bowl
Rimless System
Hidden fixation set

Unified Water Label 3.15 liters

FINISHES

01 White
41 Matt White
81 Matt Black
45 Concrete Grey
65 Antique Pink
71 Sky Blue
66 Matt Natural Beige
06 Glossy Natural Beige
47 Matt Natural Beige
07 Glossy Alpine Brown
48 Matt Red Wine

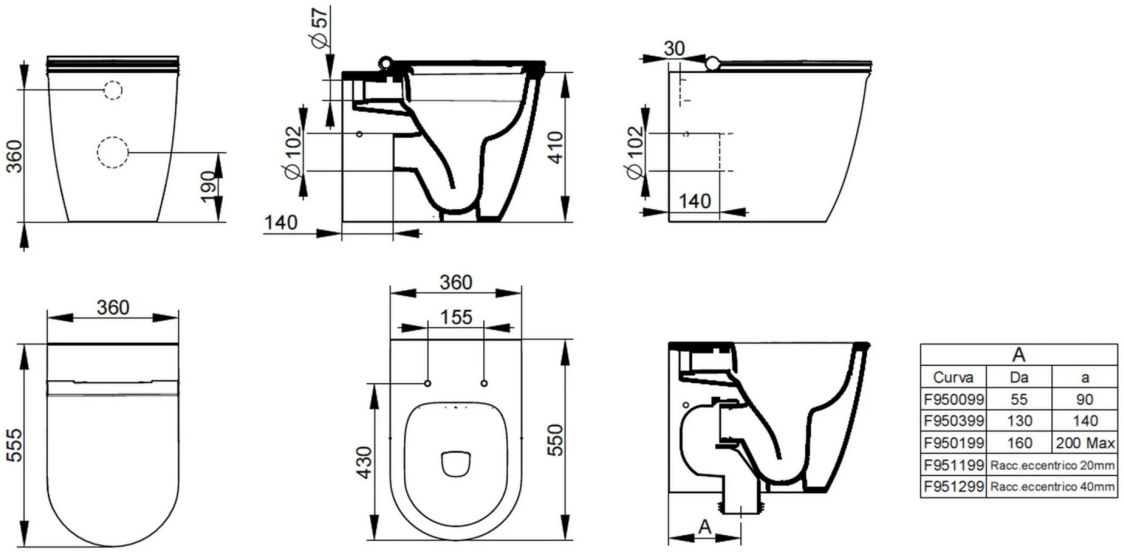

A		
Curva	Da	a
F950099	55	90
F950399	130	140
F950199	160	200 Max
F951199	Racc.eccentrico 20mm	
F951299	Racc.eccentrico 40mm	

COMPLEMENTS

S483307
soft closing seat and cover, in thermosetting material, with metal hinges and quick-release system.

Ceramica Dolomite reserves the right to change technical data sheets and operating characteristics at any time without prior notice.
The dimensions and weights shown may differ slightly from the actual pieces, due to the tolerance characteristics inherent in the ceramic material and its manufacturing process.

Ceramica Dolomite S.p.A.
via Cavassico Inferiore 160 |
32026 Borgo Valbelluna-BL-Italy | +39 0437 5581
info@ceramicadolomite.it | www.ceramicadolomite.it

ACCESSORIES

F953299
fixing set for hidden btw installation.
(included)

F950099
plastic outlet bend 90° - for installation, please refer to technical sheet.

F950199
plastic outlet bend 90°, to be installed only on shifted btw bowl - for installation, please refer to technical sheet.

F950399
plastic ‘s’ outlet bend 90° - for installation, please refer to technical sheet.

VS485CR
hinges with horizon fixation set for maika soft closing seat and cover.

VS50799
buffers kit for mayka seat and cover

F951199
eccentric adapter for outlet +/- 20mm.

F951299
eccentric adapter for outlet +/- 40mm.

F956099
dolomite concealed cistern for floor-standing wc. pipe with rosette 40mm. ideal for integration with state-of-the-art sanitary ware that is also certified for reduced flushing. monoblock container with a nominal thickness of 85mm. norma-plus float valve, acoustic class 1, lga-tuv approved adjustable between 6 and 4.5lt.

Ceramica Dolomite reserves the right to change technical data sheets and operating characteristics at any time without prior notice.
The dimensions and weights shown may differ slightly from the actual pieces, due to the tolerance characteristics inherent in the ceramic material and its manufacturing process.

Ceramica Dolomite S.p.A.
via Cavassico Inferiore 160 |
32026 Borgo Valbelluna-BL-Italy | +39 0437 5581
info@ceramicadolomite.it | www.ceramicadolomite.it